















# College Park's Collection of Quality K2 Feet

FOOT	MOUNTING	WEIGHT LIMIT	SIZES	IMPACT	BUILD HEIGHT	HEEL HEIGHT	WEIGHT*	WARRANTY	L-CODE†	ENVIROSHELL
 <b>BREEZE</b>	Endo (IP)	220 lbs (21-25 cm) 275 (26-30 cm)	21-30 cm		2.4 in 2.6 in	0.38 in	523 g (25 cm)	2	L5972	
 <b>CELSUS</b>	Endo (IP)	220 lbs (21-24 cm) 300 lbs (25-30 cm)	21-30 cm		2.2 in (21-24 cm) 2.5 in (25-26 cm) 2.6 in (26-30 cm)	0.38 in	526 g	2	L5972 + L5986	
 <b>ODYSSEY<sub>K2</sub></b>	Endo (IP)	220 lbs (21-24 cm) 300 lbs (25-30 cm)	21-30 cm		3.1 in 3.3 in	0.38 in	744 g	2	L5972 + L5968	
 <b>SIDEKICKS</b>	Endo (IP)	275 lbs	One Size		2.3 in	0 in	422 g	2	L5972 + L5986	No Enviroshell
 <b>TEMPO</b>	Endo (IP)	300 lbs (21-24 cm) 330 lbs (25-30 cm)	21-30 cm		2.5 in	0.38 in	500 g	2	L5972	

\*26 cm, including Enviroshell

Caucasian, Tan, Brown

† The listing of codes with these products should not be construed as a guarantee for coverage or payment. Ultimate responsibility for the coding of services/products rests with the individual practitioner.

College Park designs and manufactures a full line of anatomically correct, custom built prosthetic solutions. College Park is ISO 13485: 2003 certified with an extensive focus on quality testing, and proudly sources and produces all products entirely in the USA. With precise engineering and quality manufacturing, College Park is committed to innovating human locomotion solutions for users all over the world.







The water-friendly Breeze foot has an optional water drain port, corrosion-resistant materials and special modifications to clear water through the entire system. The Enviroshell is antimicrobial, infused with a UV inhibitor and comes with a special toe-rollover assist. Perfect to stock, the Breeze brings a maximum solution for a minimum cost.



### WATER-FRIENDLY DESIGN

The Breeze foot features an optional water drain port which makes the foot a great option for the shower, beach or pool. Adding a Shelltread® can provide additional traction for wet environments.




### INTELLIWEAVE® ASSISTED MOVEMENT

The Breeze is constructed with Intelliweave composite material for precision strength and flexibility. An Intelliweave keel also maintains foot flat longer during terminal stance. The Breeze achieves 26 percent more ground contact during dorsiflexion than its competitor for superior stability.



### SMOOTH GAIT ENVIROHELL®

The beautiful, seamless College Park Enviroshells are infused with a UV inhibitor and pure silver for antimicrobial properties. The Breeze shell is built with a special toe-rollover assist for ground clearance and is also removable and replaceable.

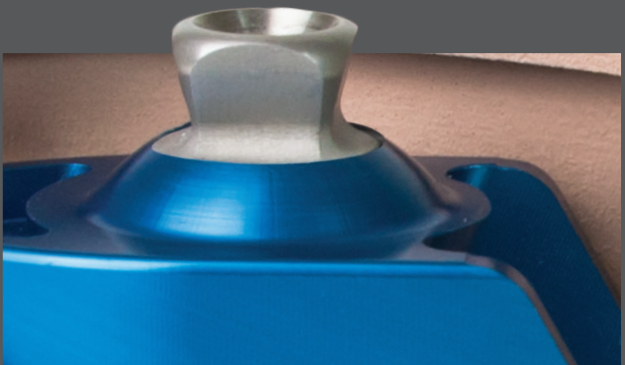

### INTEGRATED PYRAMID. INTEGRATED SAVINGS.


The Breeze comes standard with an integrated pyramid at no extra cost — a savings of up to \$45 over other low cost K2 feet in the same class.



TOTAL GROUND CONTACT through terminal stance

BREEZE  
6.2°

CLOSEST COMPETITOR  
4.6°

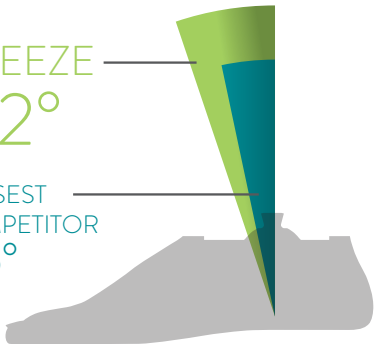

## TOTAL GROUND CONTACT

College Park's 30 years worth of in-depth research and experience using progressive technology allowed for a new generation of SACH feet, the Breeze. The full-length composite keel maintains foot flat longer during terminal stance. It achieves 26 percent more ground contact than a SACH foot during dorsiflexion for improved stability--a necessity for new or geriatric amputees. The keel also improves rollover by increasing flexibility and providing support during push off, resulting in a more comfortable and natural motion.



## TECHNICAL SPECIFICATIONS

### FUNCTION

Economy

### MOUNTING

Endo (IP)

### SIZES

21-30 cm

### WEIGHT LIMIT

21-25 cm | 220 lbs (100 kg)

26-30 cm | 275 lbs (125 kg)

### BUILD HEIGHT

21-25 cm | 2.4 in (6.2 cm)

26-30 cm | 2.6 in (6.5 cm)

### WEIGHT\*

523 g

### WARRANTY

2 years

### L CODES\*\*

L5972

### IMPACT LEVEL

 K2

### HEEL HEIGHT

0.38 in (10 mm)

### ENVIROHELL®†

 standard



\*25cm model, including Enviroshell. \*\*The listing of codes with these products should not be construed as a guarantee for coverage or payment. Ultimate responsibility for the coding of services/products rests with the individual practitioner. † Caucasian, Tan or Brown.